





# CD065Q- Series

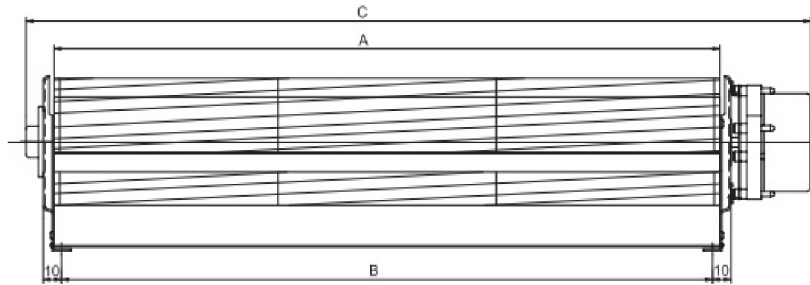


Size	Ø65mm
Housing	Aluminum
Impeller	Aluminum
Motor	DC Brushless type
Operating Temp.	0°C ~ +45°C
Insulation	Class A



Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C								
CD06512V12BHWQ	120	112	185	12	0.80	9.6	2200	81	8.2	48	560
CD06512V24BHWQ				24	0.45	10.8					
CD06518V12BHWQ	180	172	245	12	0.55	6.6	1500	95	3.8	38	650
CD06518V24BHWQ				24	0.25	6.0					
CD06524V12BHWQ	240	232	305	12	0.70	8.4	1400	124	3.5	40	740
CD06524V24BHWQ				24	0.30	7.2					
CD06530V12BHWQ	300	292	365	12	0.75	9.0	1300	145	3.1	40	830
CD06530V24BHWQ				24	0.35	8.4					
CD06536V12BHWQ	360	352	425	12	0.80	9.6	1200	166	2.9	40	920
CD06536V24BHWQ				24	0.40	9.6					
CD06542V12BHWQ	420	412	485	12	0.85	10.2	1100	191	2.7	41	1000
CD06542V24BHWQ				24	0.40	9.6					

\_ for B / S = Ball Bearing / Sleeve Bearing

CD06512/18/24

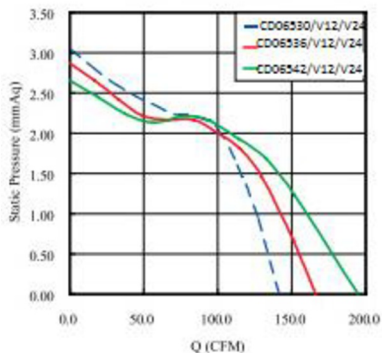

CD06530/36/42

