





CA050E- Series

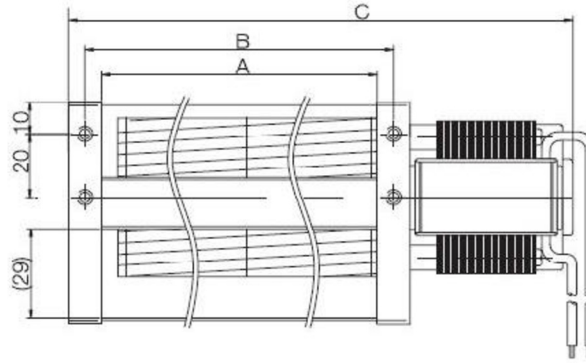


Size	Ø50mm
Housing	Aluminum
Impeller	Aluminum
Motor	AC Shaded Pole Type
Operating Temp.	0°C ~+45°C
Insulation	Class A




Model Number	Size (mm)			Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C									
CA05009V11_HWE	98	108	162	120	50/60	0.15/0.13	11/10	2300/2400	24/28	2.7/3.6	36/37	610
CA05009V22_HWE				230	50/60	0.09/0.07	11/10	2300/2400	24/28	2.7/3.6	36/37	
CA05019V11_HWE	198	208	267	120	50/60	0.23/0.21	18/16	2000/1600	67/60	3.1/3.7	36/33	770
CA05019V22_HWE				230	50/60	0.10/0.09	14/13	1900/1400	63/56	3.1/3.6	35/32	
CA0529V11_HWE	298	308	377	120	50/60	0.35/0.33	24/24	2200/1800	116/88	3.7/4.3	41/37	1100
CA0529V22_HWE				230	50/60	0.15/0.14	21/20	2100/1500	116/81	3.7/4.1	41/35	
CA0535V11_HWE	350	368	437	120	50/60	0.35/0.33	23/23	2100/1500	110/103	3.7/4.3	41/36	1200
CA0535V22_HWE				230	50/60	0.15/0.14	20/19	1900/1300	110/92	3.5/4.0	40/34	

_ for B / S = Ball Bearing / Sleeve Bearing


CA05009E



CA05019E



CA05029E



CA05035E

